


# 12-Fiber Optic Termination Box

2 Input Ports at 12mm – For Drop Cable

## Overview

Fibertronics Inc. offers a variety of fiber optic termination boxes engineered to securely house and organize fiber splices, connectors, and pigtails. Suitable for a wide range of applications—including telecommunications, data centers, and network equipment rooms—these enclosures provide a protected environment that ensures stable performance and simplifies cable management. With durable construction and user-friendly features, our termination boxes support efficient fiber distribution, minimize signal loss, and promote long-term system reliability.

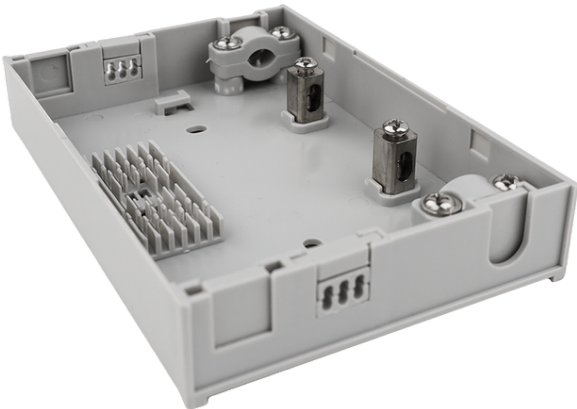

## Features

- Wall-mountable or pole-mountable
- Easy installation and maintenance
- Bend radius protection for fiber cables
- Integrated splice trays for fiber management
- Durable, weather-resistant construction

## Applications

- FTTH and FTTB installations
- Data centers and server rooms
- Telecommunications and broadband networks
- Enterprise LAN/WAN infrastructures
- Outdoor/indoor building entry points

## Technical Specifications

|                  |                                    |
|------------------|------------------------------------|
| Ports            | 2 Input Ports                      |
| Splice Capacity  | 12 Fibers                          |
| Cable Diameter   | 2x $\Phi$ 12mm max.                |
| Dimensions       | 152mm x 107mm x 31mm               |
| Adapter Slots*   | Up to 4x SC Simplex -OR- LC Duplex |
| Housing Material | PC + ABS                           |
| Accessories      | Wall Mount Kit                     |

\*Accepts both flanged and non-flanged adapters (sold separately)